


OTARIIDS/PHOCIDS SPLASH FASTLOC® GPS SUITE SPECIFICATIONS

Tag Family	Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH	SPLASH10-F-238	✓	✓	✓	✓	Optional	470	105 x 56 x 30	217
SPLASH	SPLASH10-F-296	✓	✓	✓	✓	Optional	470	86 x 85 x 29	192
SPLASH	SPLASH10-F-297	✓	✓	✓	✓	Optional	240	86 x 55 x 26	130

1) The above estimated lives are calculated assuming 250 transmissions and 24 Fastloc® acquisitions per day. Utilizing the Wet/Dry sensor and duty cycling, the life can be extended.

These tags all feature the latest Fastloc® technology for improved satellite acquisition and maximized battery and tag duration. They also incorporate tough urethane abrasion protection (body armor) and robust nitinol antennas.

Model: SPLASH10-F-297

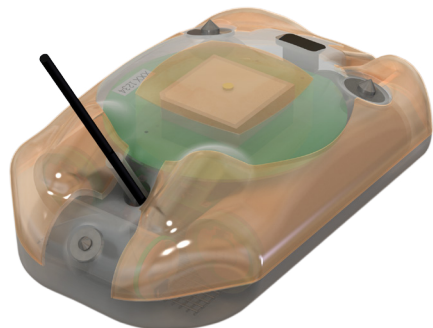

Model: SPLASH10-F-296



Model:
SPLASH10-F-238

