

OTARIIDS/PHOCIDS SPLASH SUITE SPECIFICATIONS

PG 1 OF 2

Tag Family	Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH	SPLASH10-F-238	✓	✓	✓	✓	Optional	470	105 x 56 x 30	217
SPLASH	SPLASH10-BF-238	✓	✓		✓		470	105 x 56 x 30	215
SPLASH	SPLASH10-F-296	✓	✓	✓	✓	Optional	470	86 x 85 x 29	192
SPLASH	SPLASH10-BF-296	✓	✓		✓		470	86 x 85 x 29	195
SPLASH	SPLASH10-F-297	✓	✓	✓	✓	Optional	240	86 x 55 x 26	130
SPLASH	SPLASH10-BF-297	✓	✓		✓		240	86 x 55 x 26	130

1) The above estimated lives are calculated assuming 250 transmissions and 24 Fastloc® acquisitions per day. Utilizing the Wet/Dry sensor and duty cycling, the life can be extended.

These tags all feature tough urethane abrasion protection (body armor) and robust nitinal antennas. Similarly numbered tags may look the same, but offer different feature sets.


Model: SPLASH10-F-238 / BF-238



Model: SPLASH10-F-296 / BF-296



Model: SPLASH10-F-297 / BF-297

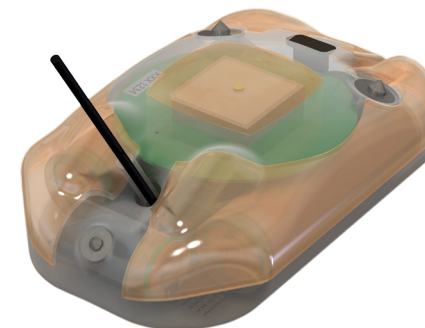

OTARIIDS/PHOCIDS SPLASH SUITE SPECIFICATIONS


PG 2 OF 2

Tag Family	Model	Argos	Fastloc®	Depth	Temperature	Light Level	Life (days) ¹	L x W x H (mm)	Weight (g)
SPLASH	SPLASH10-296	✓		✓	✓	✓	510	86 x 85 x 25	193
SPLASH	SPLASH10-309	✓		✓	✓	✓	190	76 x 56 x 32	125

1) The above estimated lives are calculated assuming 250 transmissions per day. Utilizing the Wet/Dry sensor and duty cycling, the life can be extended.

These tags all feature tough urethane abrasion protection (body armor) and robust nitinal antennas. Similarly numbered tags may look the same, but offer different feature sets.

Model: SPLASH10-296

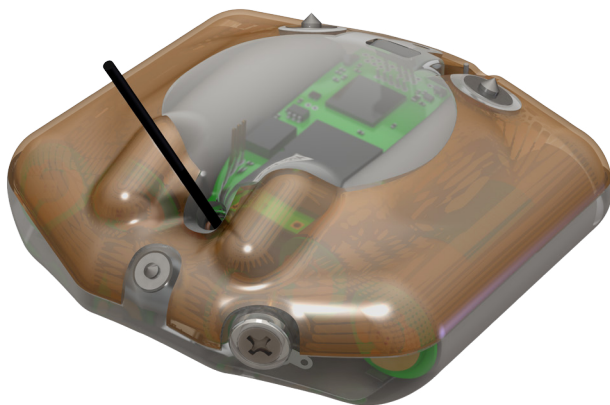

Model: SPLASH10-309

